

# TRAP SPECIFICATIONS


Model: **HPAF4-85**

Prep. By E.A. Date: 08/17/07


Response: Insertion Loss

Minimum operating frequency: 1 GHz

Marker #	Freq. Desc.	Freq. Mhz	Typ. Loss(dB)	Limits(dB)
1	Ref.	20	52	50 min.
2	Ref.	48	51	50 min.
3		65	54	48 min.
4		85	1.4	1.7 max

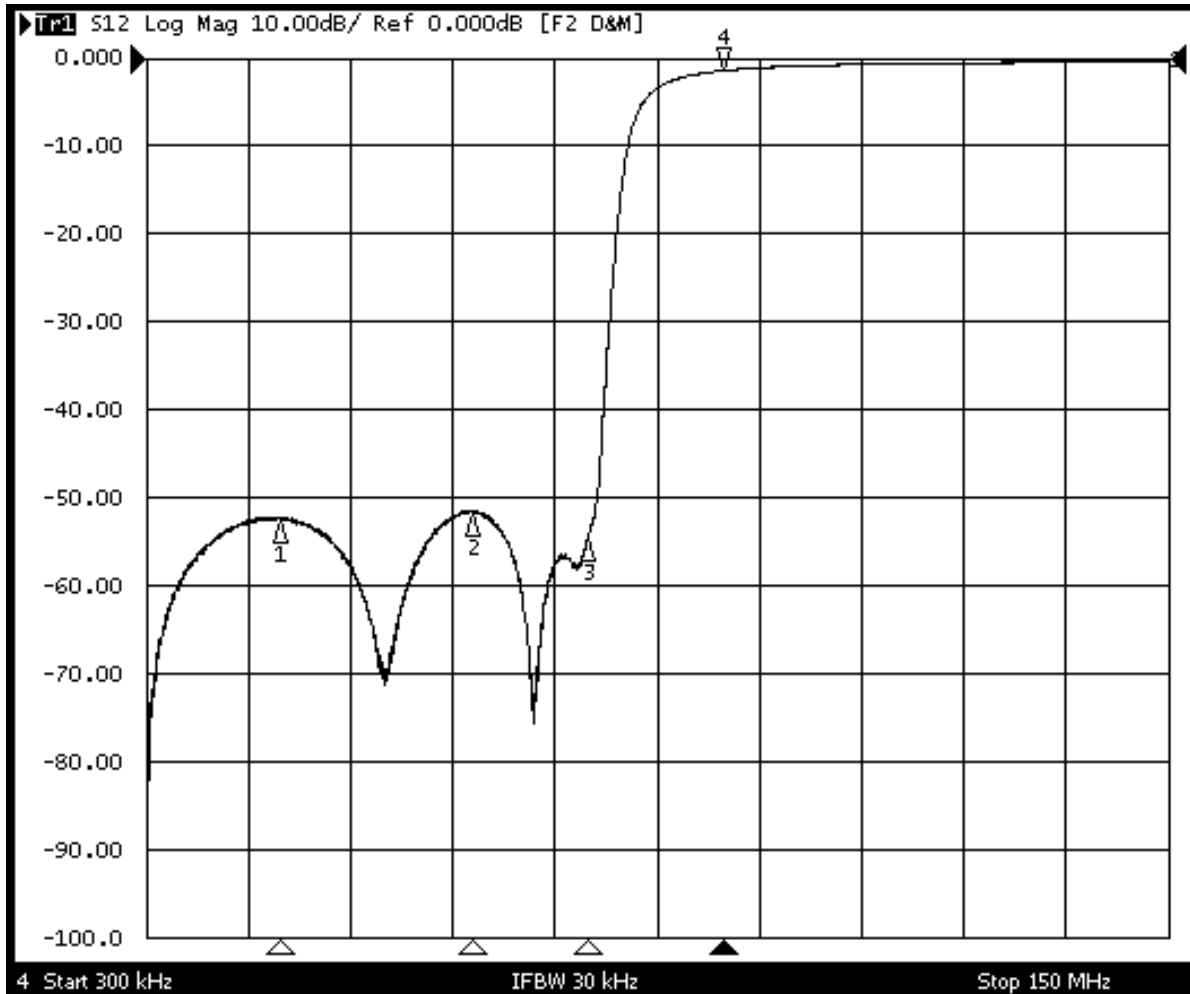

Customer Approval \_\_\_\_\_ Date \_\_\_\_\_

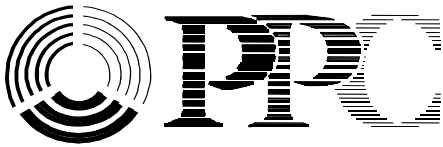

# TRAP SPECIFICATIONS


Model: **HPAF4-85**

Prep. By E.A. Date: 08/17/07


Response: Insertion Loss

Minimum operating frequency: 1 GHz

Marker #	Freq. Desc.	Freq. Mhz	Typ. Loss(dB)	Limits(dB)
1		85	1.4	1.7 max.
2		450	0.3	
3		860	0.4	
4		1000	0.5	

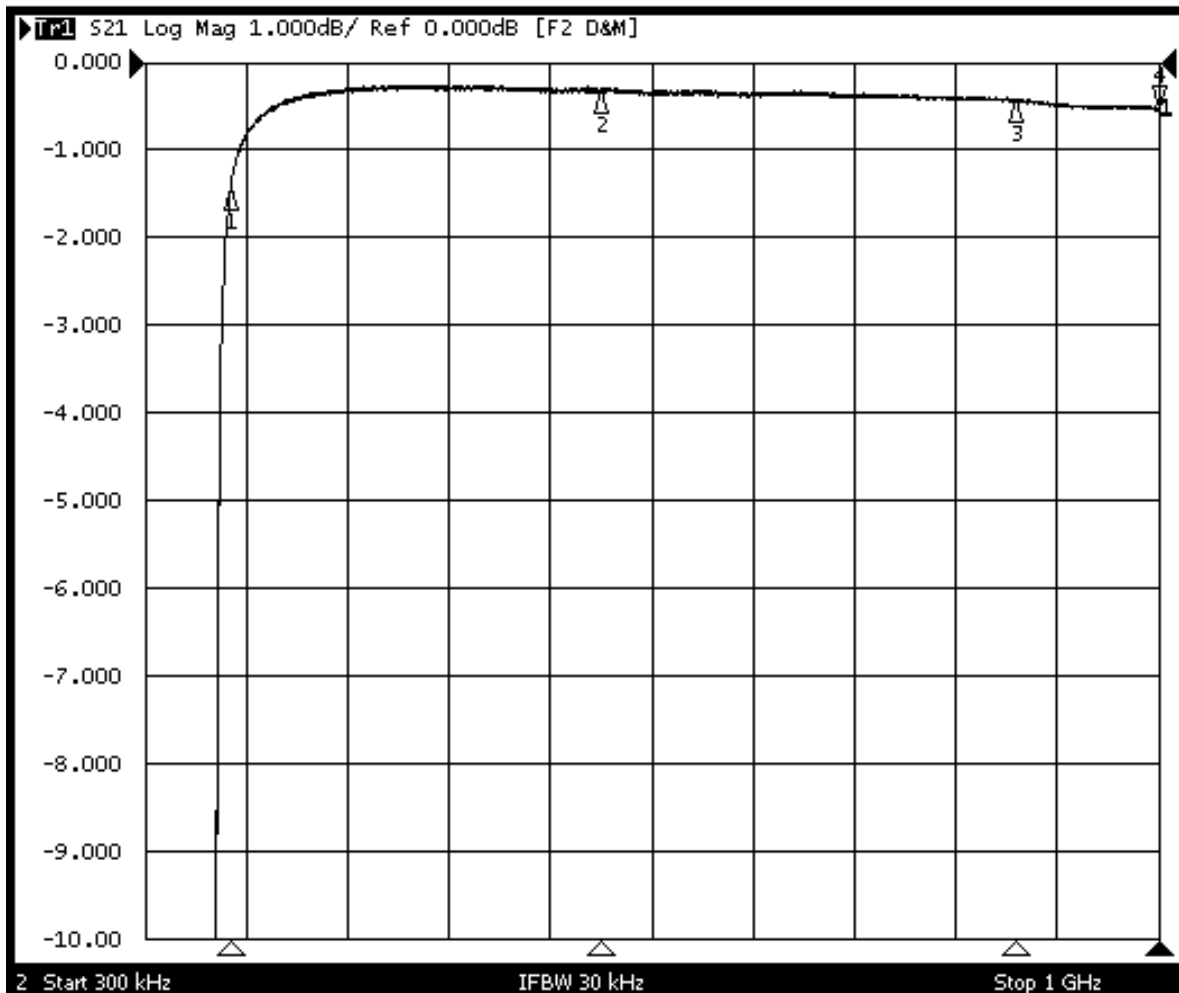

Customer Approval \_\_\_\_\_ Date \_\_\_\_\_

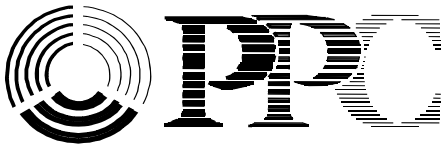

# TRAP SPECIFICATIONS


Model: **HPAF4-85**

Prep. By E.A. Date: 08/17/07

Response: Return Loss

Minimum operating frequency: 1 GHz

Marker #	Freq. Desc.	Freq. Mhz	Typ. Loss(dB)	Limits(dB)
1		10	26	
2		42	22	
3		65	22	
4		85	27	
5		110	22	
6		550	22	
7		1000	23	

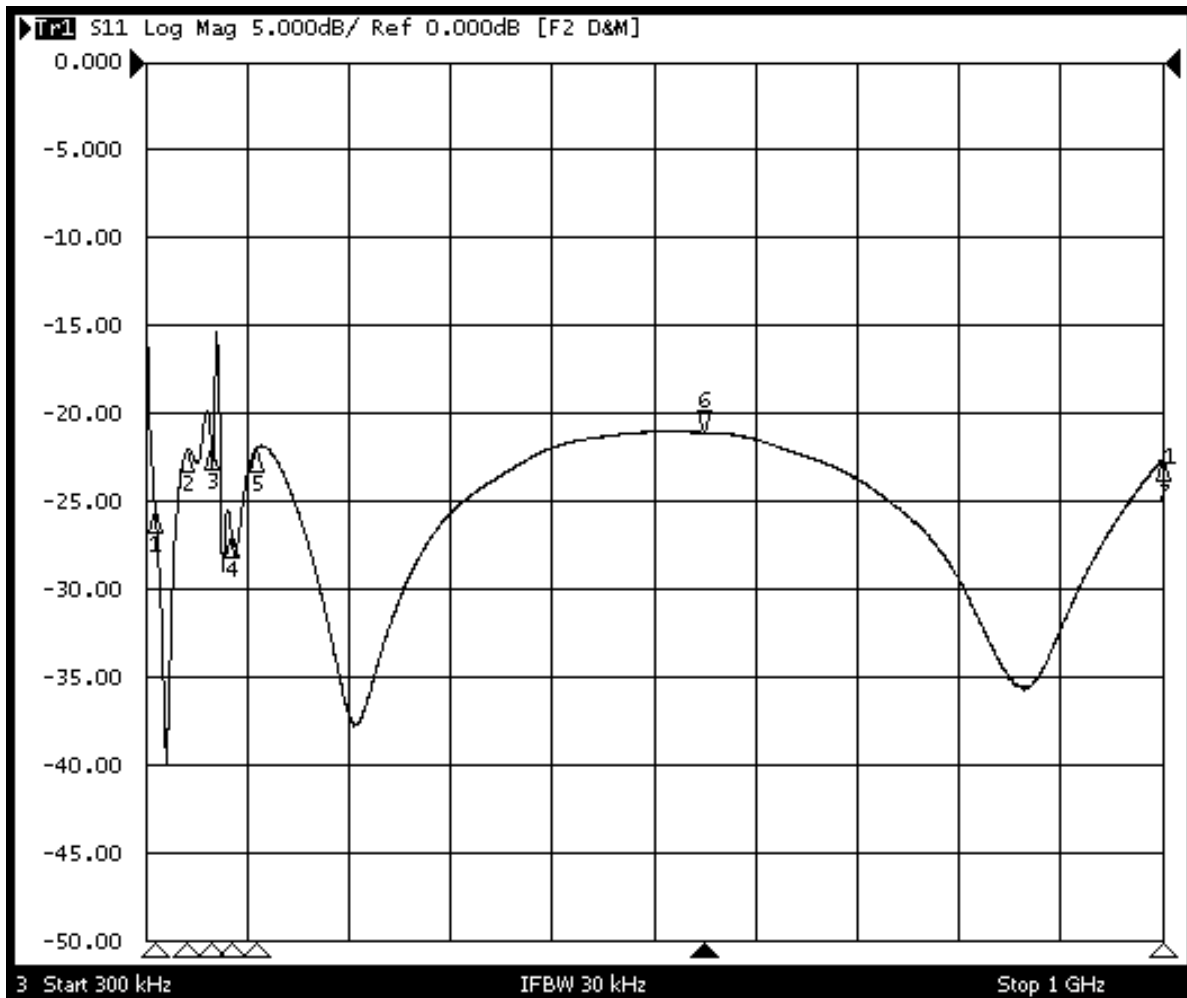

Customer Approval \_\_\_\_\_ Date \_\_\_\_\_